
Hoisting flags with side arm, attached left or right 120 x 300 cm


(1) Attached on left



Sketches are not to scale

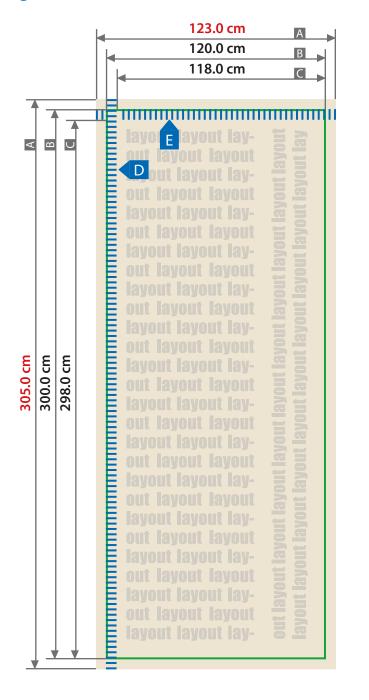

Safety distance (z) 6.0 cm




- A = File format
- B = Final format
- C = Visible area
- D = Edge binding
- E = Hemstitch seam for side arm

Create file alignment as shown! Even applies if the alignment of your artwork does not correspond to the alignment of the format.

120.0 cm 8 U


(2) Attached on right

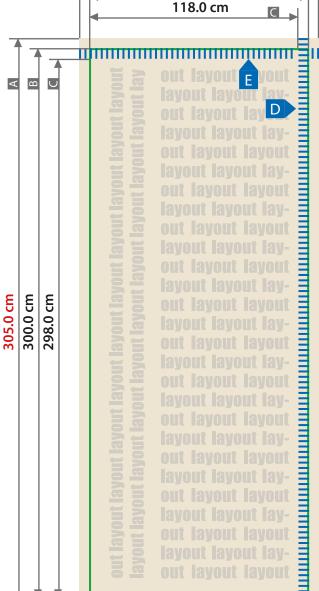


Α


В

123.0 cm

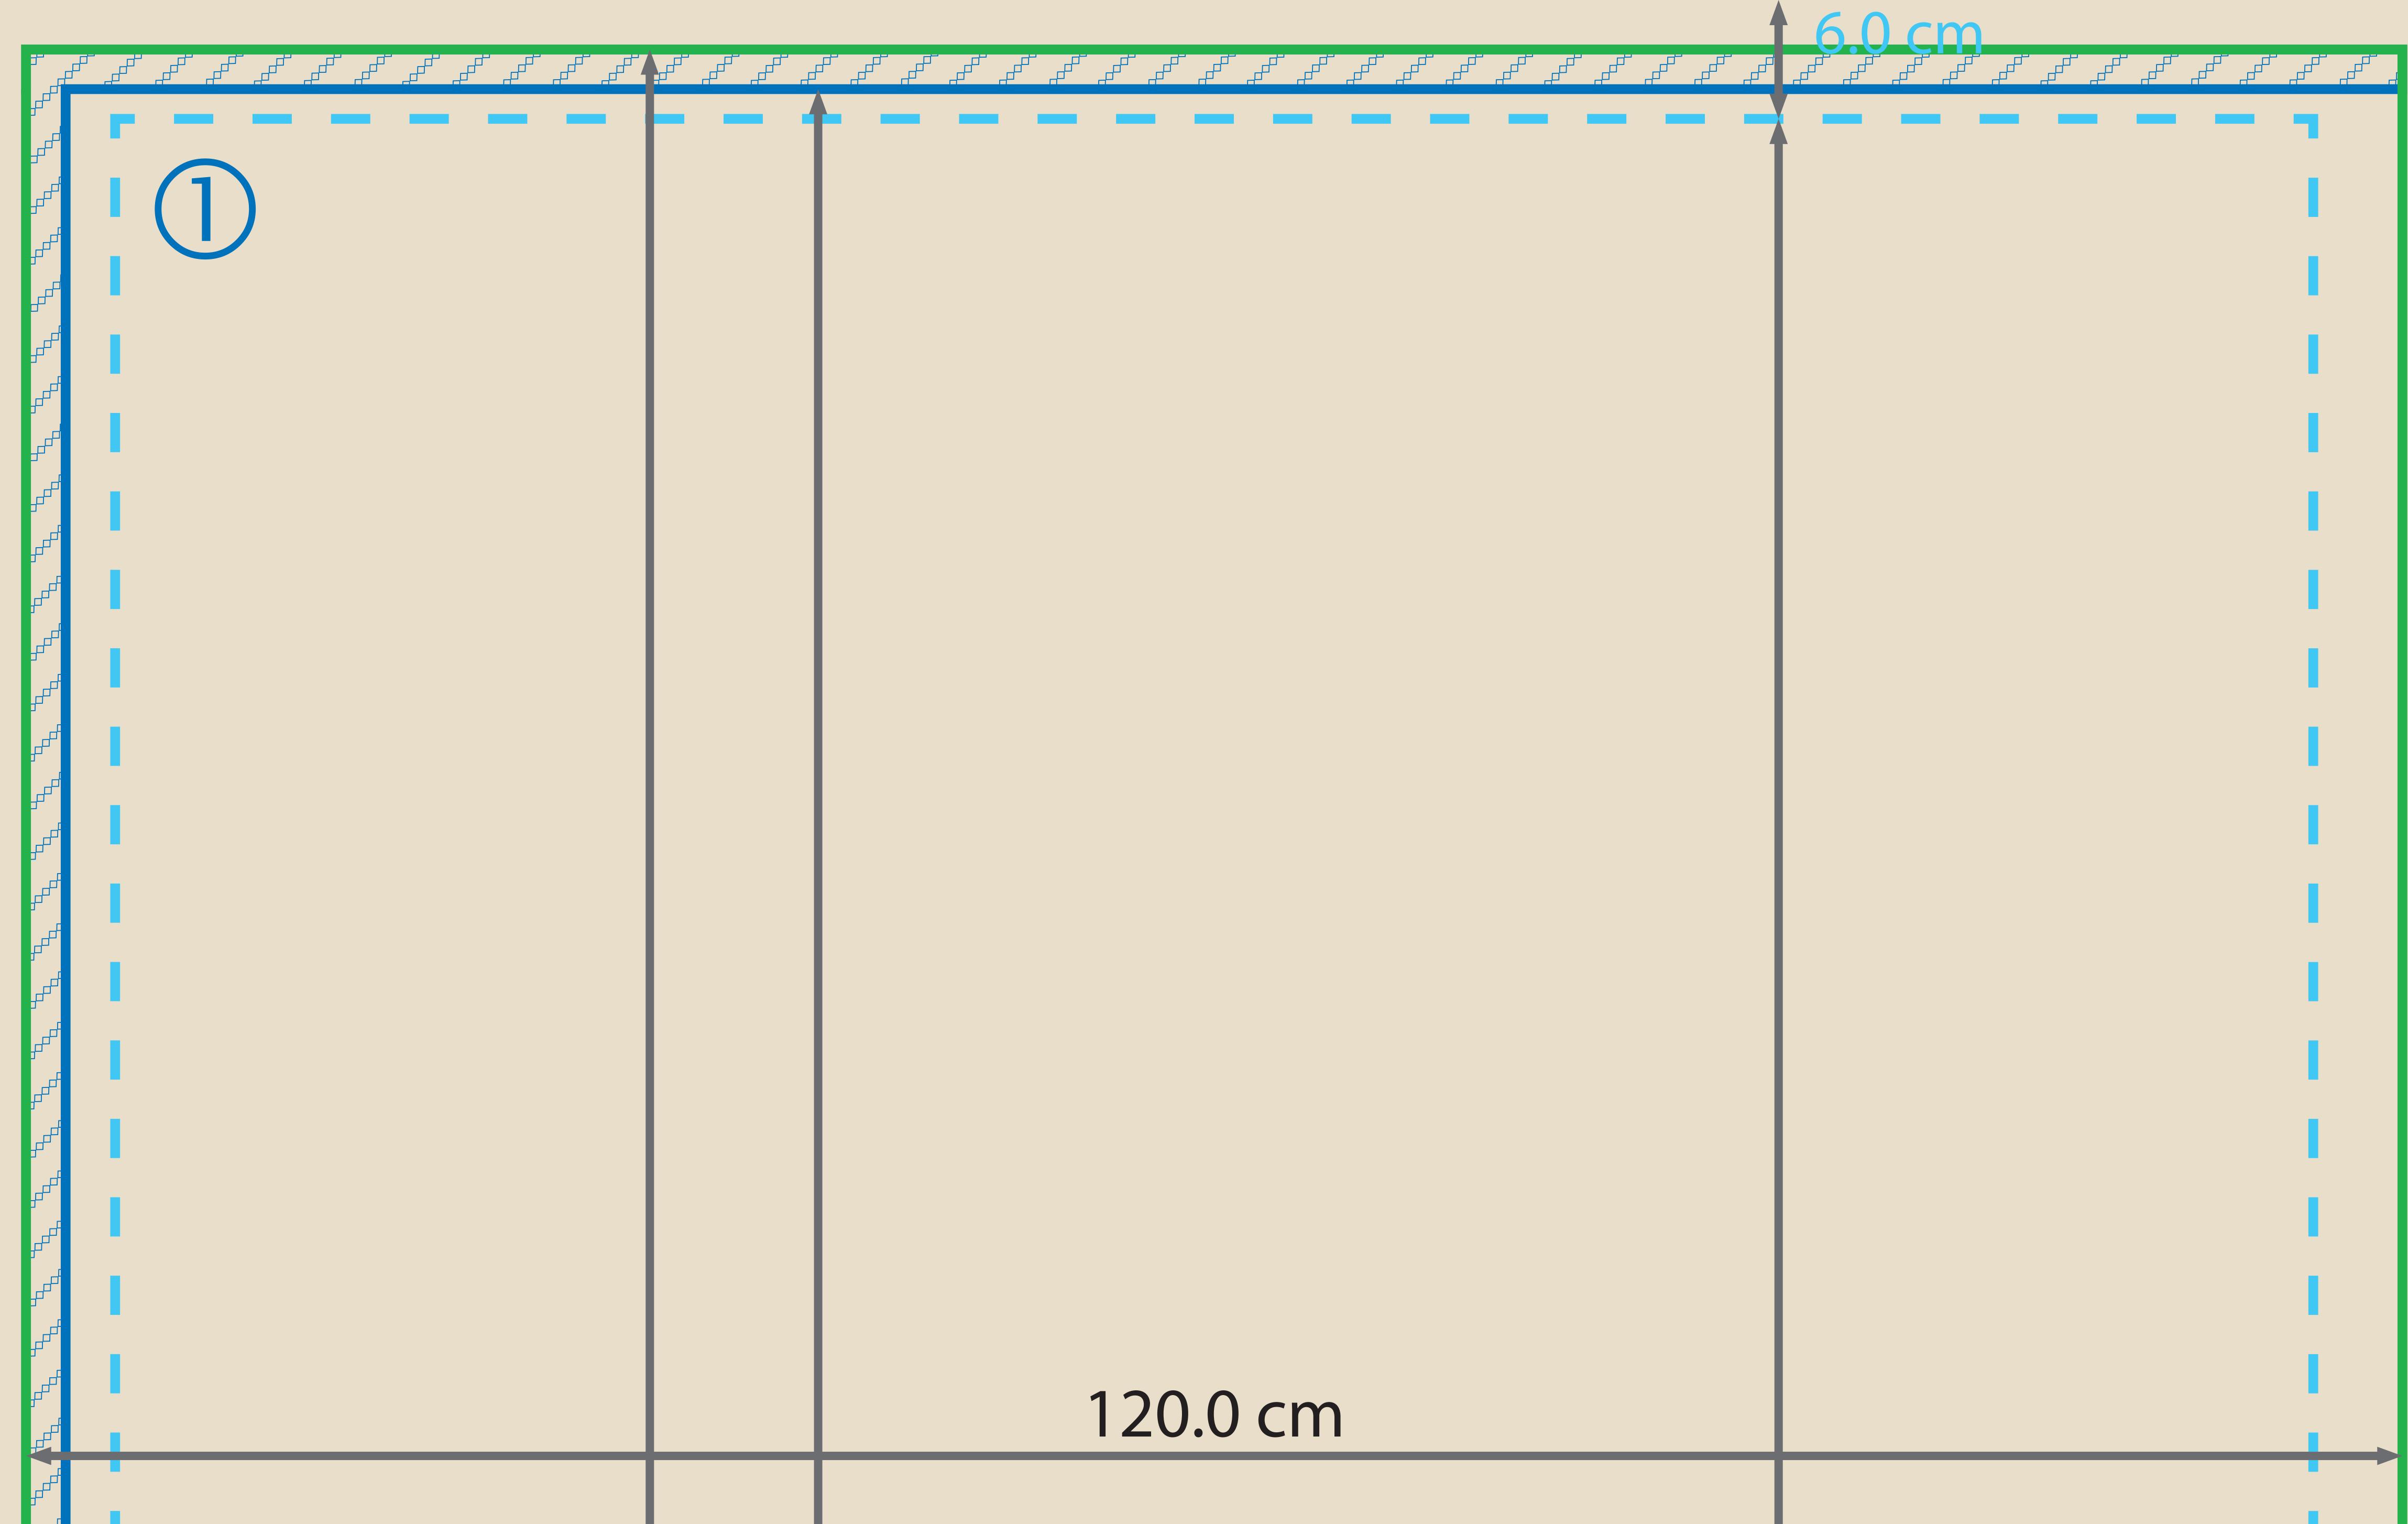


		118.0 cm	
₽₽ ₽₽			
₽ ₽₽ ₽₽			
₽₽ [₽]			
₽₽ [₽]			
₽₽ ₽₽ ₽₽			
₽ ₽ ₽ ₽			
₽ ^{₽°} ₽ ^{₽°}			
	E C O		

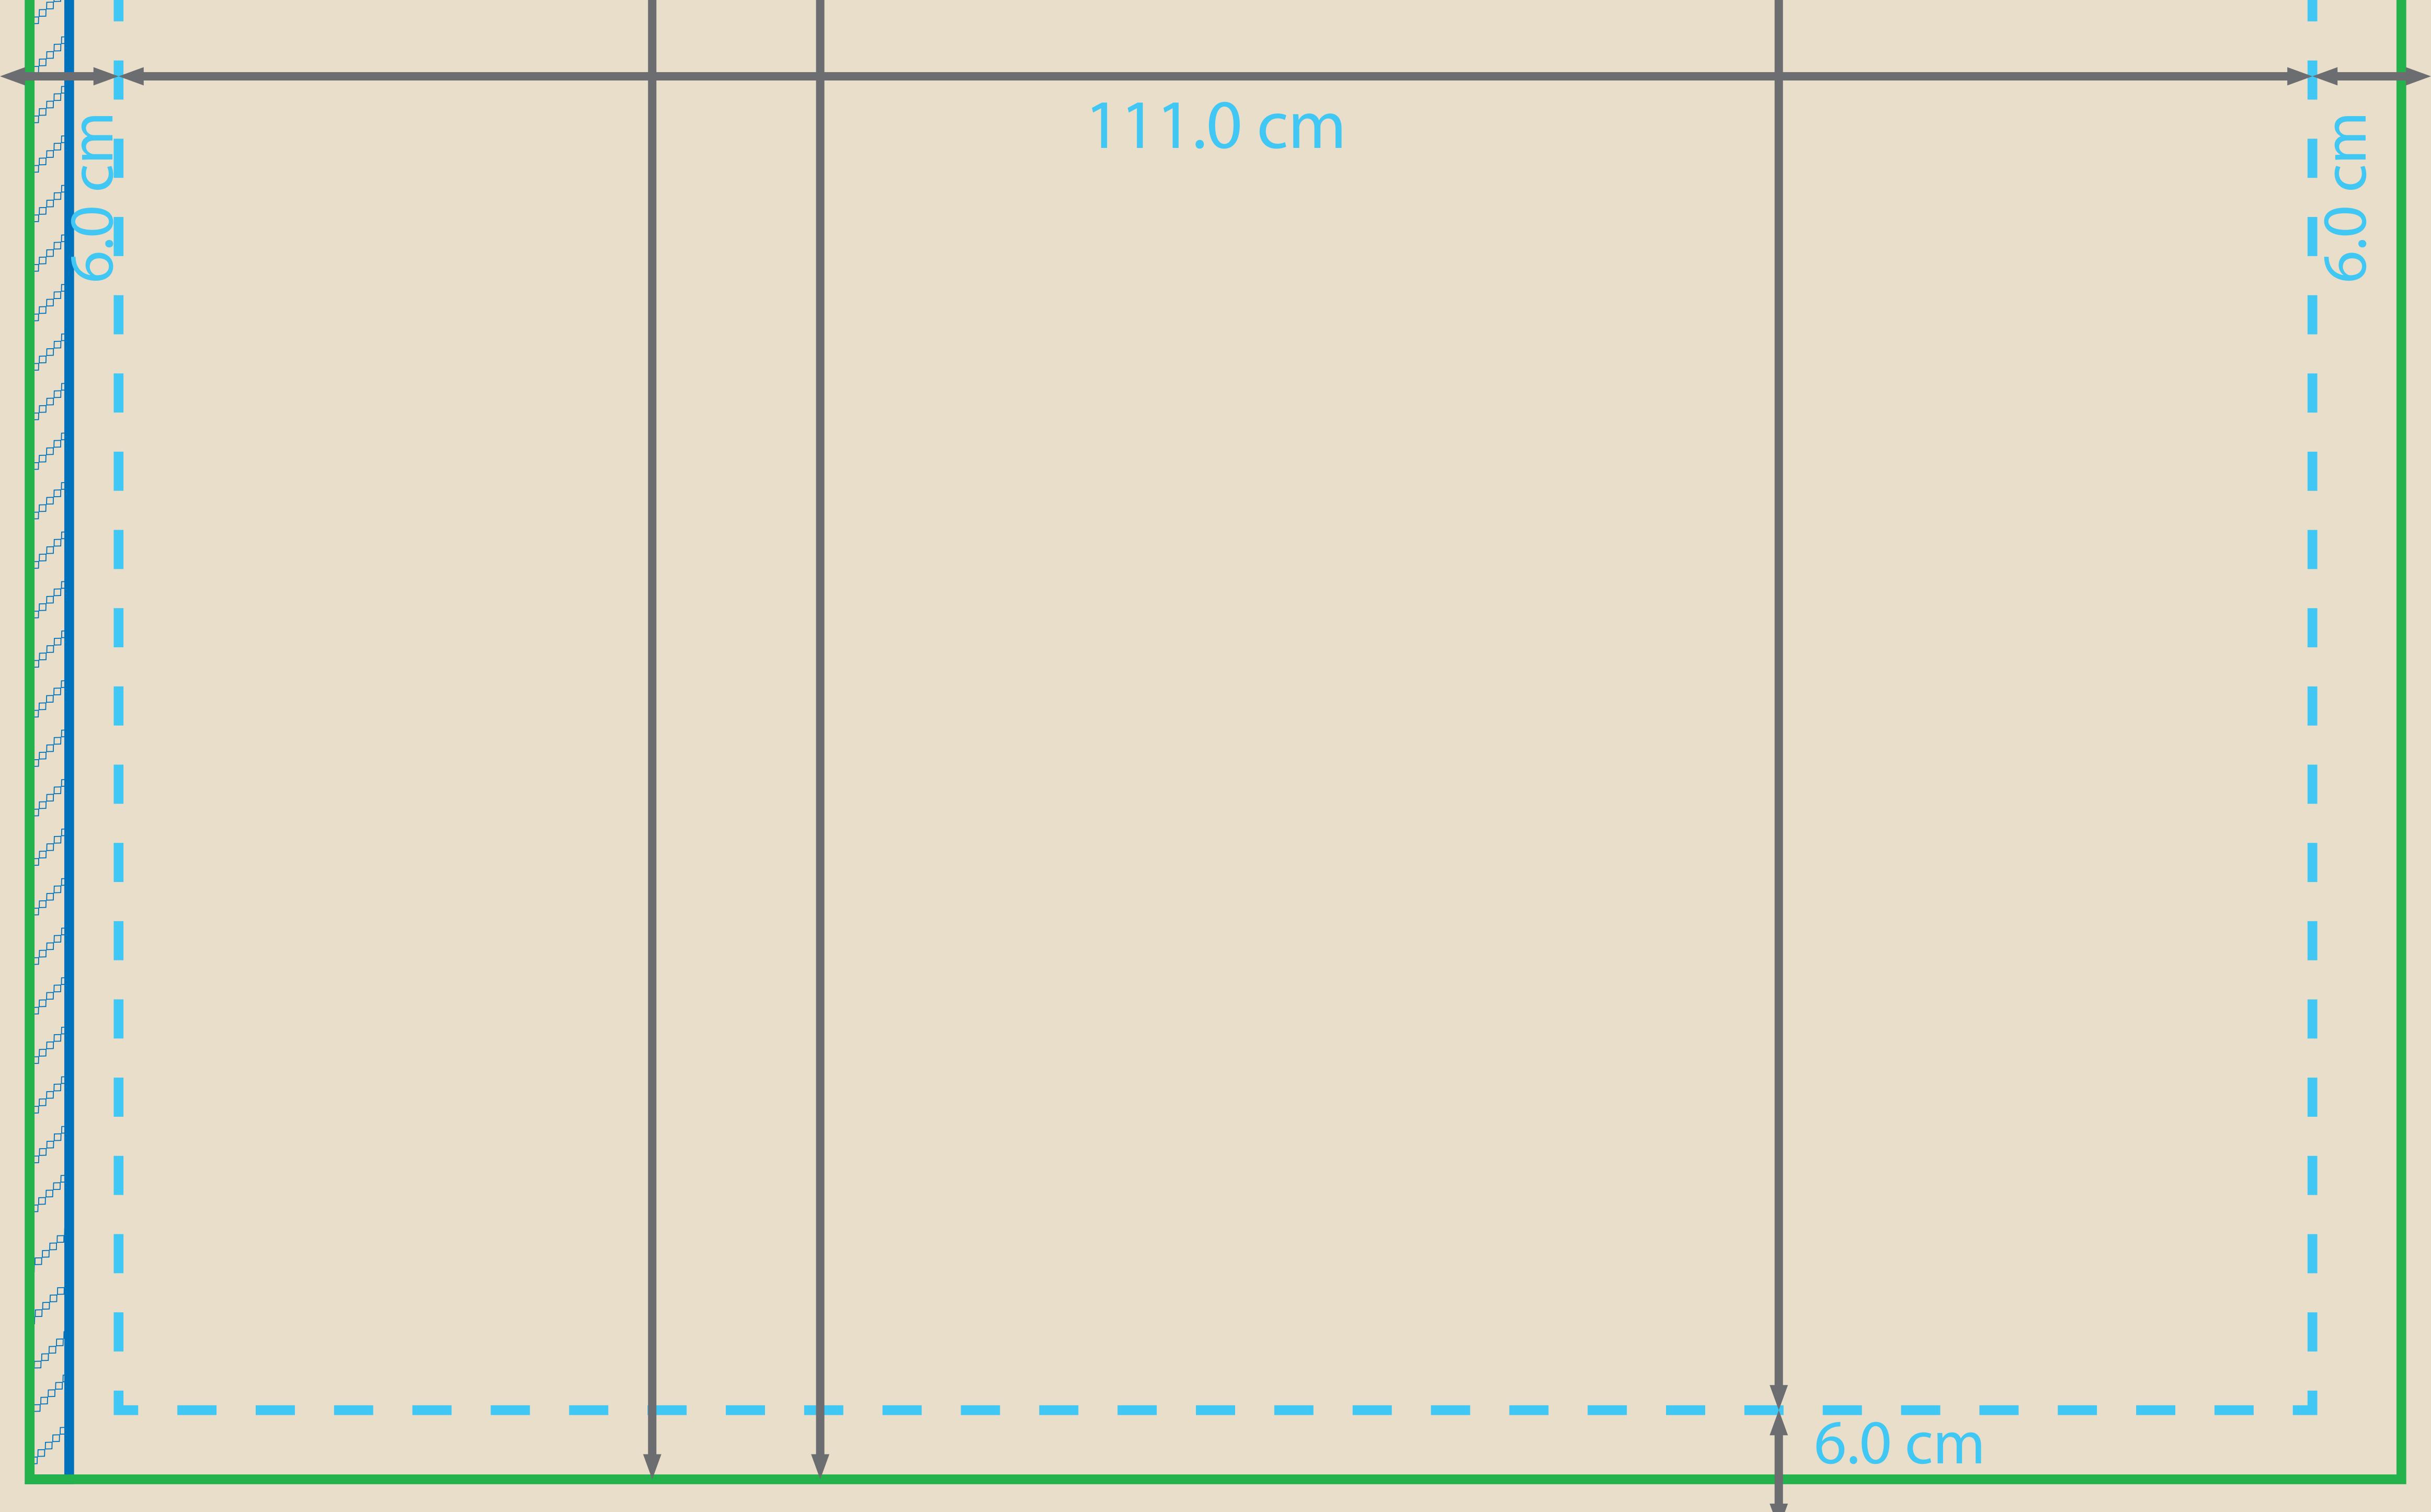

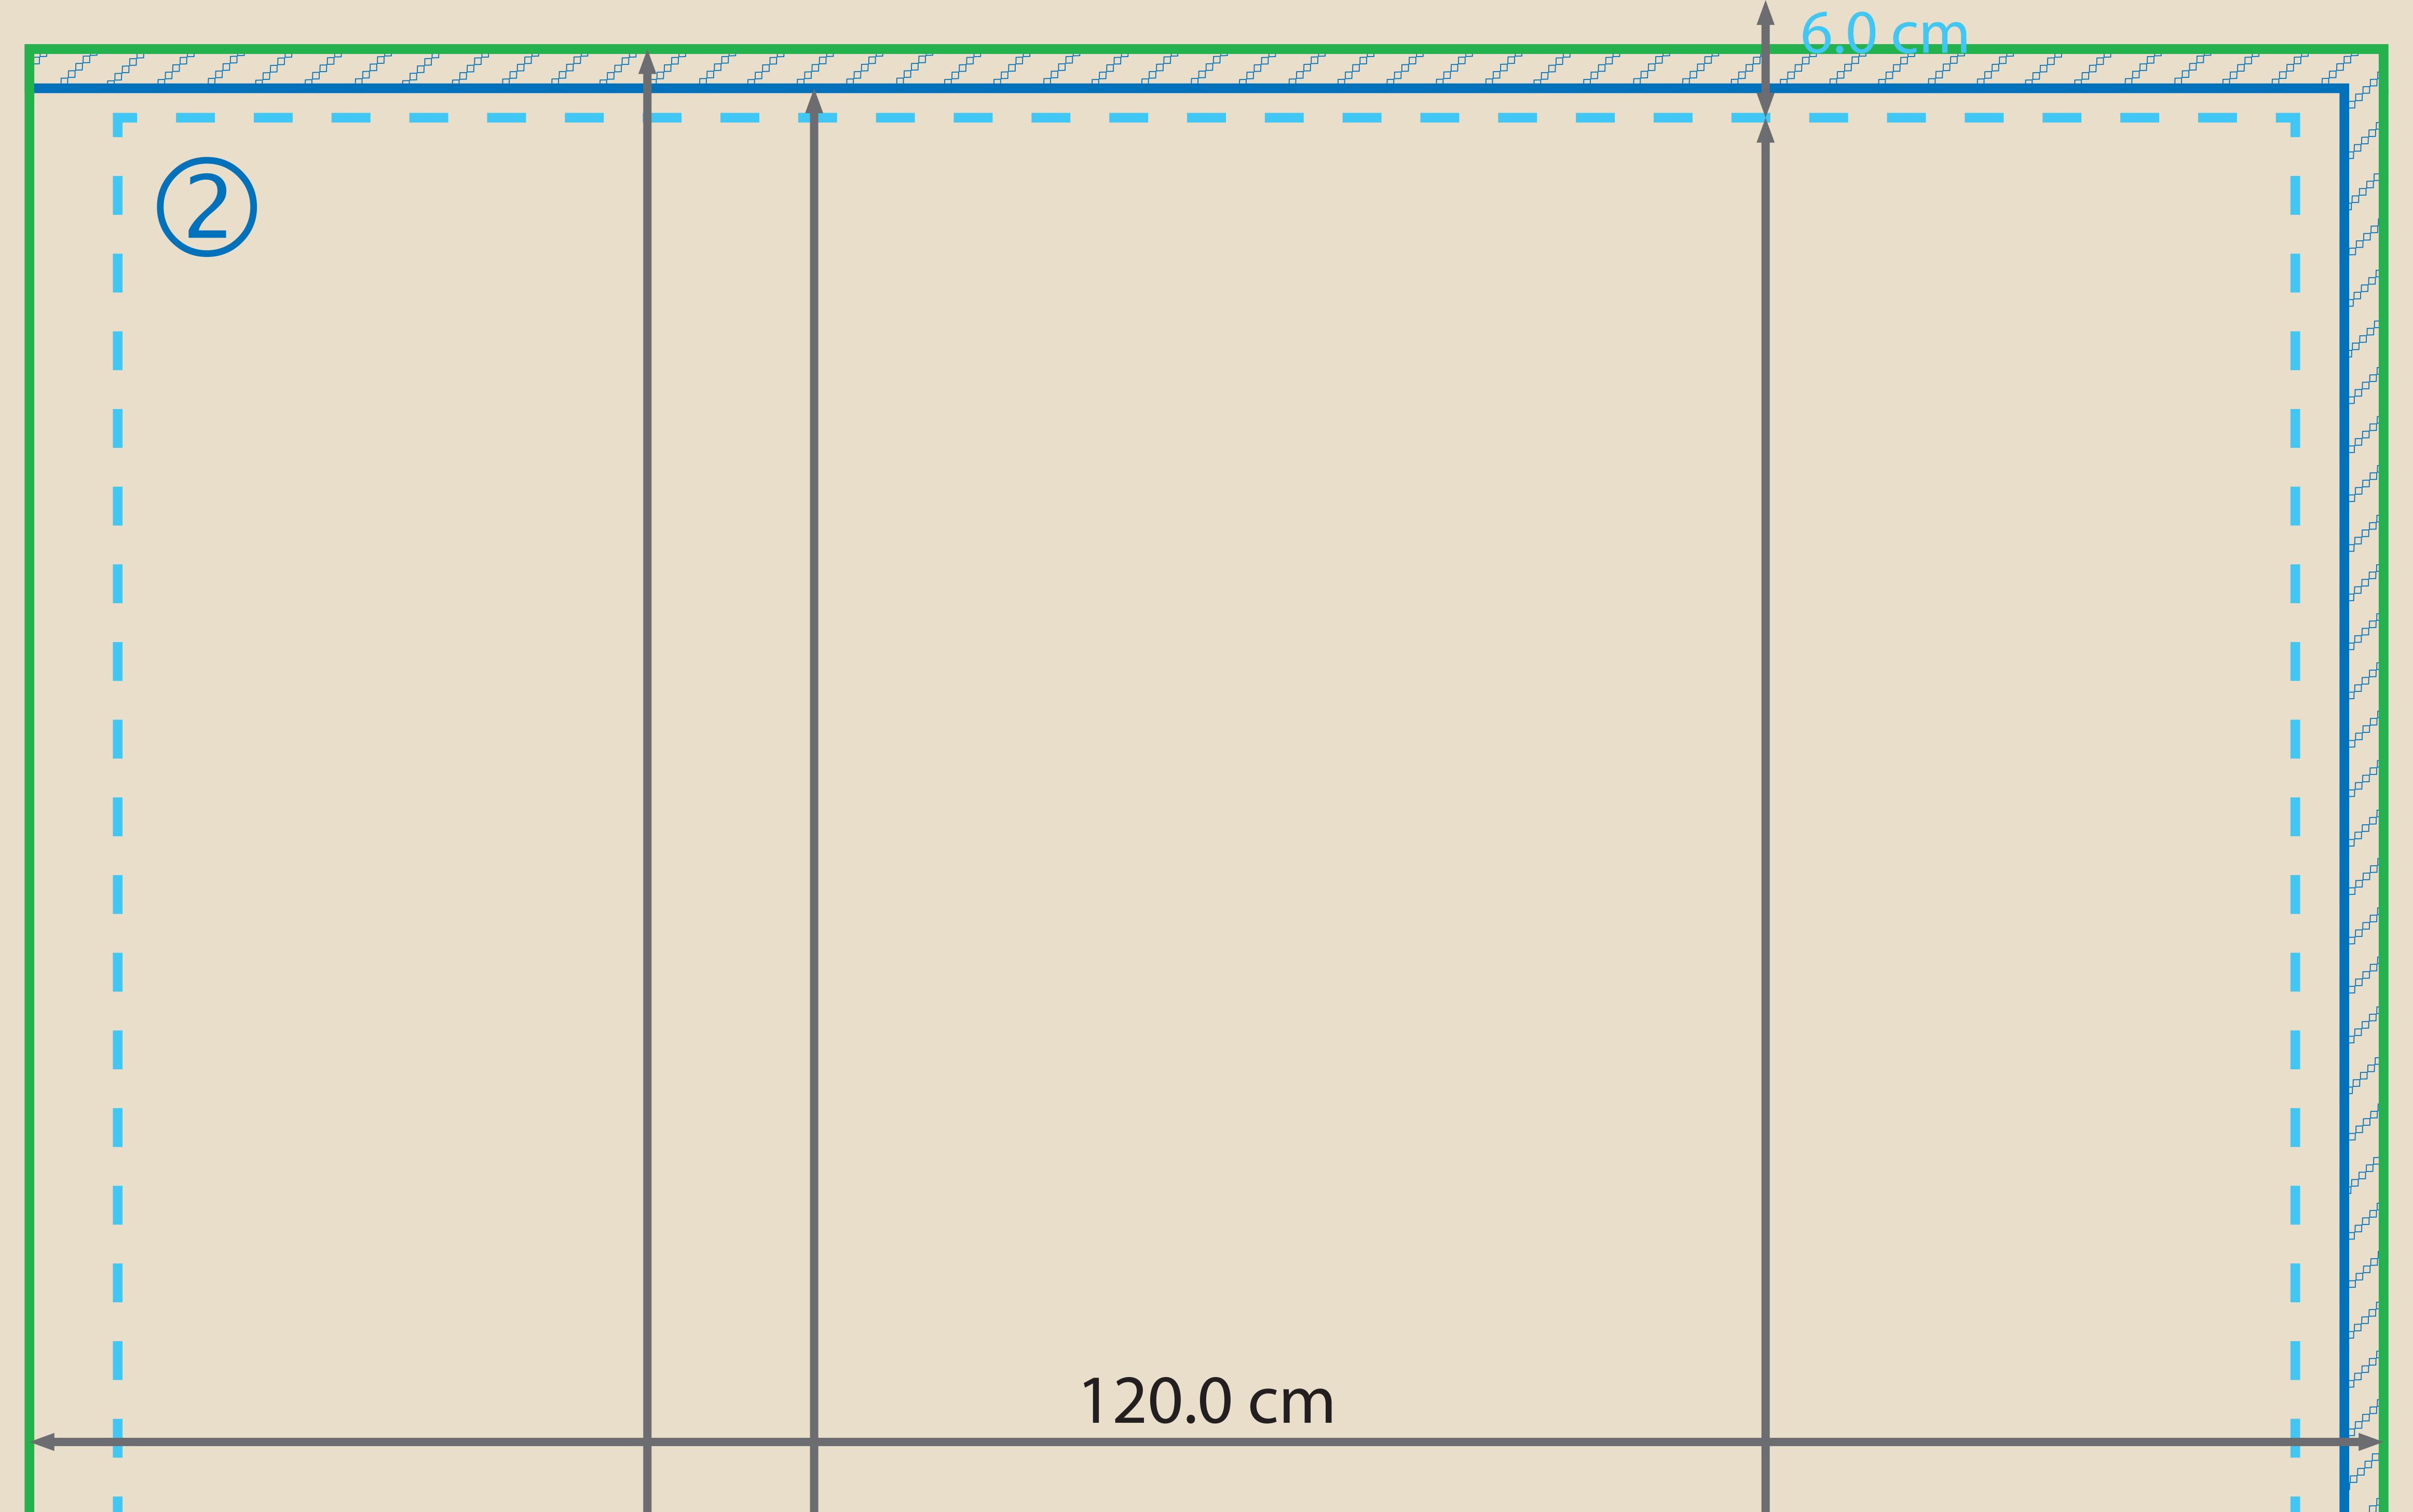

		118.0 cm			ł
					ł
					ł
				₽ [₽]	} -
					}
					} -}
					} -{
					,
					} -}
					} _
E	E		E		F -F
				₽₽ [₽]	4

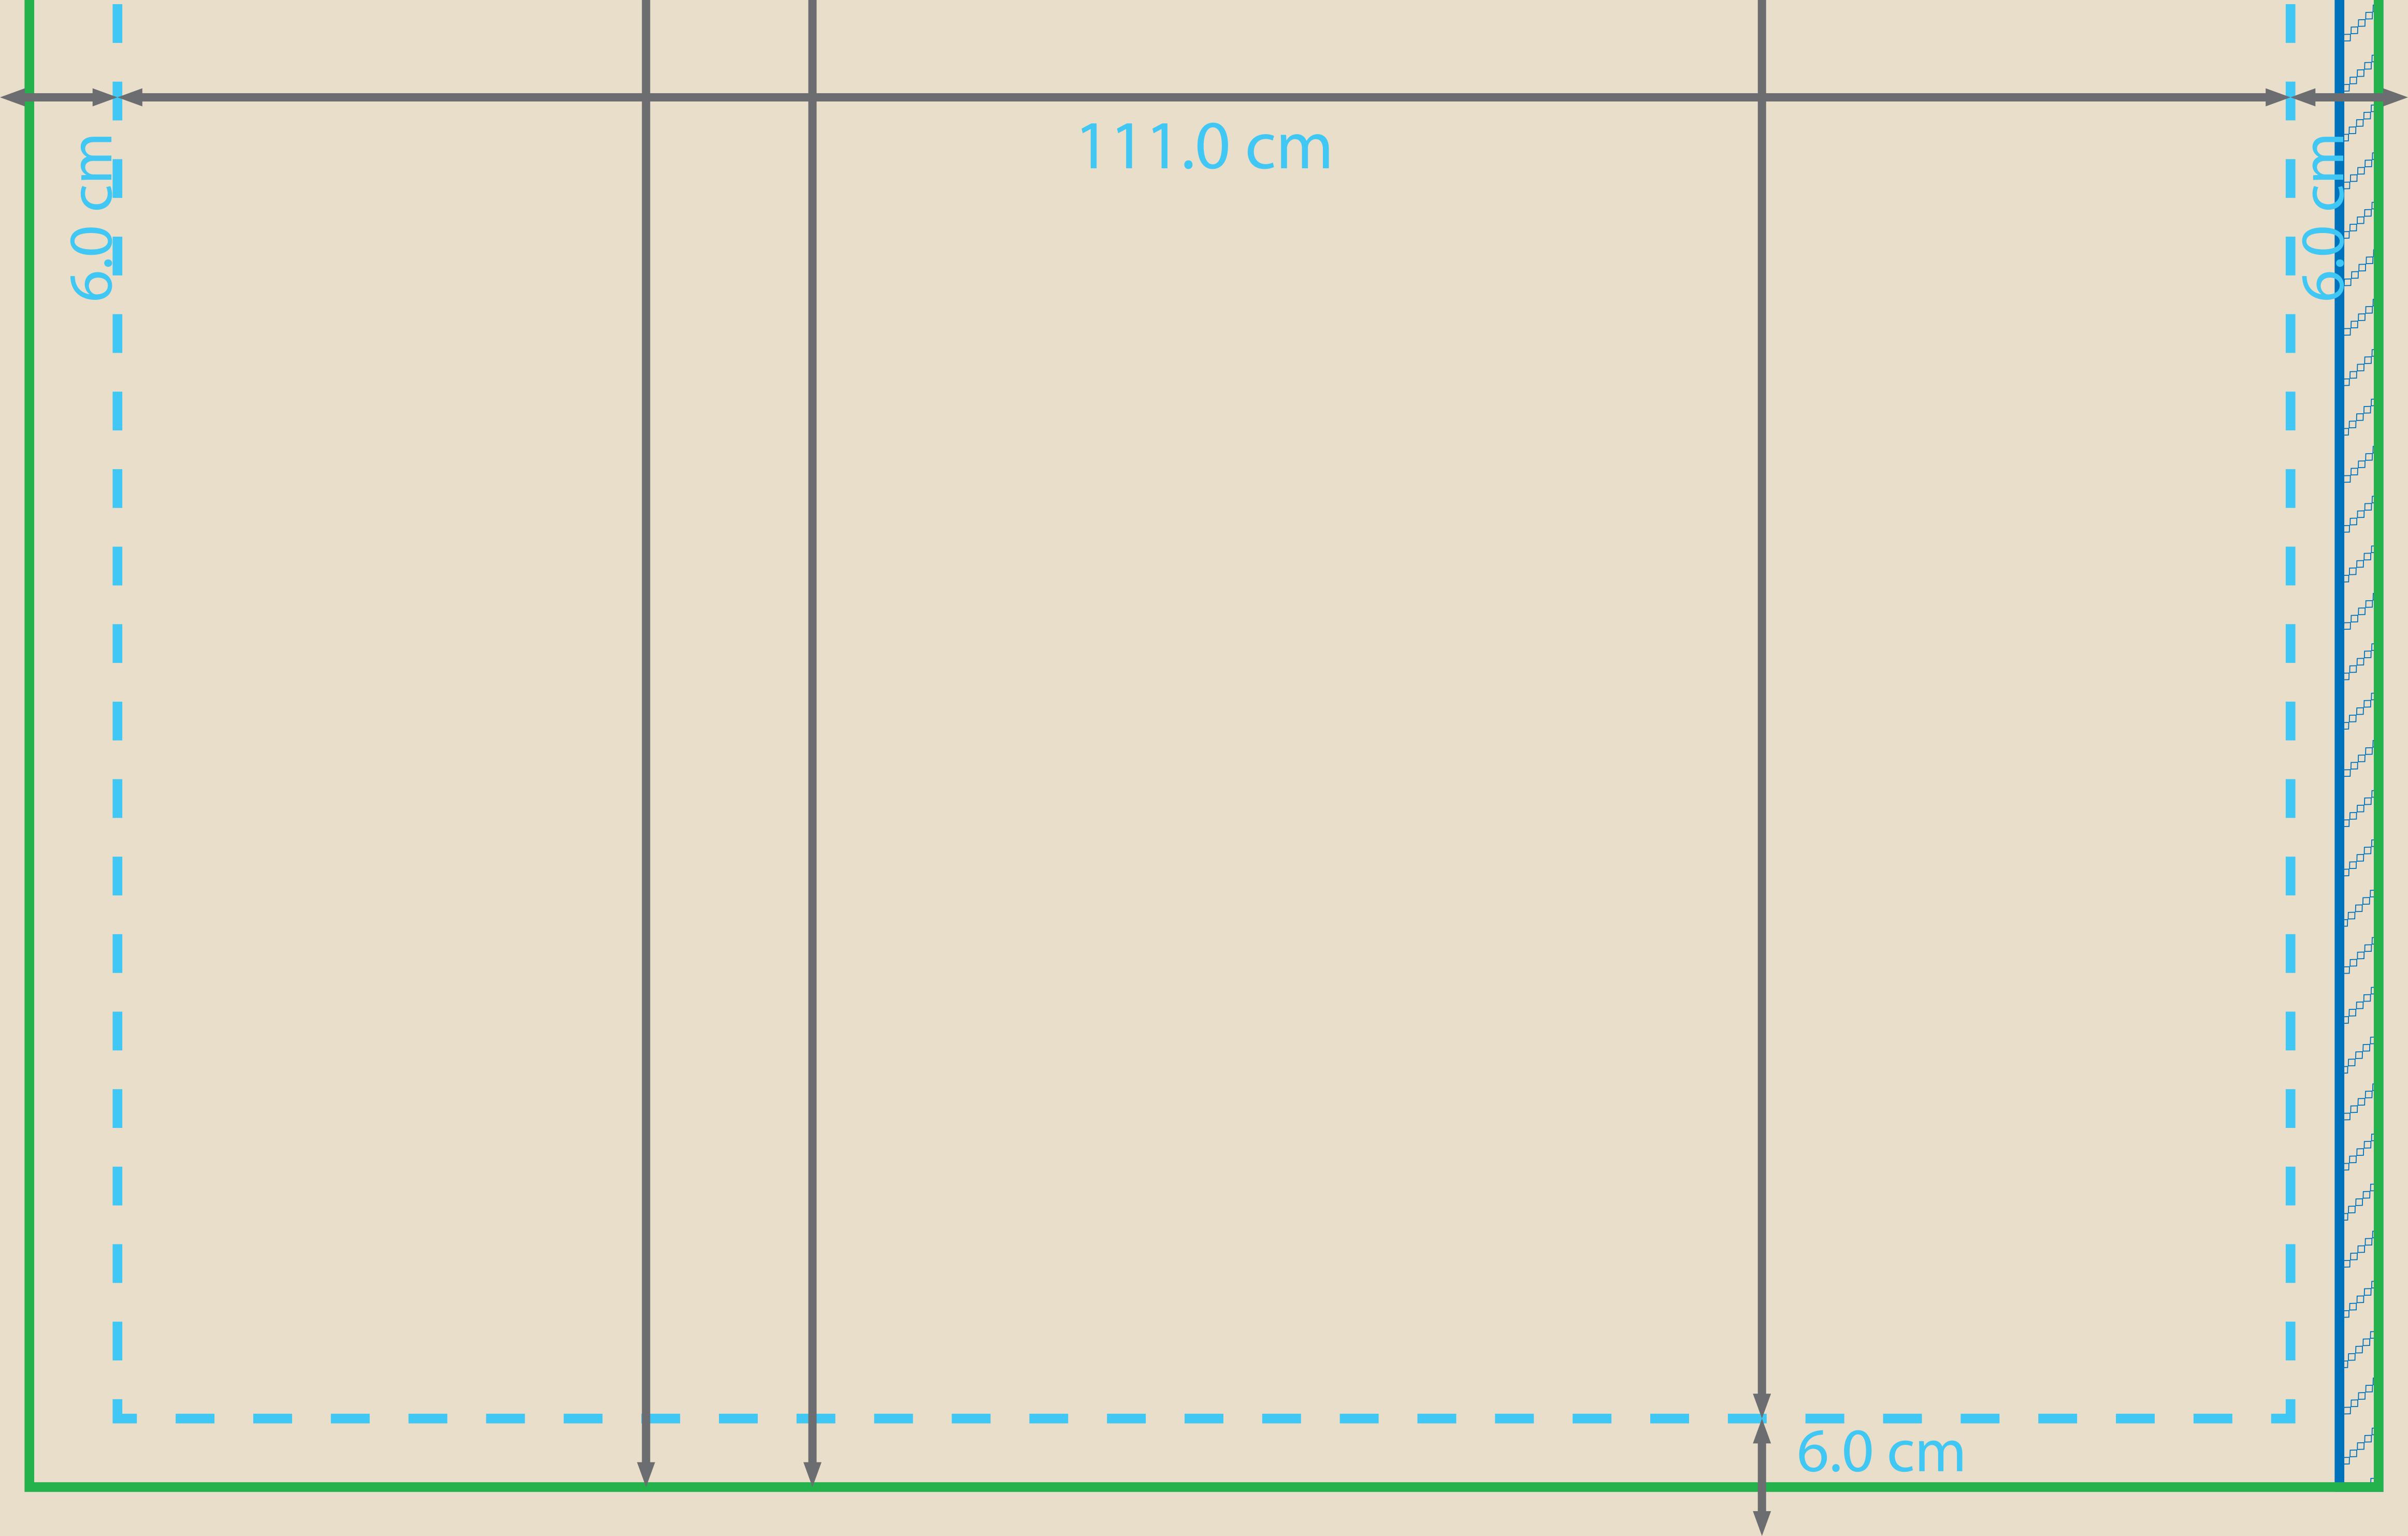

Tips and Tricks

The durability of a flag depends a lot on its exposure to wind, air pollution and other climatic conditions. Depending on its location, other influences may also occur. A normal wear and tear can therefore not be avoided.

Flags are among fabrics one of the most heavily stressed material and are therefore subject to strong deterioration due to their outdoor use.

That's how you can improve the durability of your flags:

• Bring in your flag at night in case of bad weather conditions or strong wind;

• Make sure the flag does not touch anything when blowing as this might increase the risk of an early material wearout;

• Repair holes and other damages immediately;

The normal wearout that comes with age and period of usage does not justify a complaint. No rights of claim can be derived from damages to normal wear and tear.